

558, 214

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 December 2004 (09.12.2004)

PCT

(10) International Publication Number  
**WO 2004/107326 A2**

(51) International Patent Classification<sup>7</sup>: **G11B 7/00**

(74) Agent: RÖGGLA, Harald; Philips Intellectual Property  
& Standards, Triester Strasse 64, A-1101 Vienna (AT).

(21) International Application Number:  
PCT/IB2004/050802

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(22) International Filing Date: 28 May 2004 (28.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03101589.4 2 June 2003 (02.06.2003) EP

(71) Applicant (for all designated States except US): KONIN-  
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (for US only): EBERDORFER,  
Wolfgang [AT/AT]; Triester Strasse 64, A-1101 Vienna  
(AT).

[Continued on next page]

(54) Title: CONDITIONAL ACCESS TO STORE CONTENT USING NON-STANDARD MEDIA

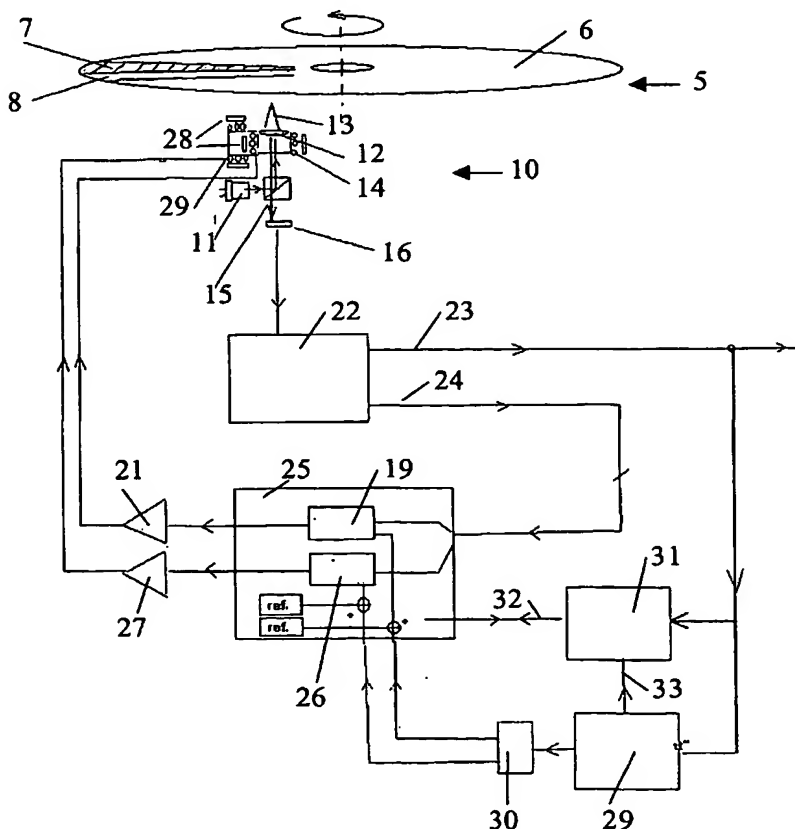

(57) Abstract: A data carrier with  
at least one data recording area (2, 6)  
in which data recording area data are  
stored in accordance with a predefined  
data recording standard, comprises  
at least one defective area (3, 7) in  
the data recording area (2, 6), which  
defective area is designed in such  
a way that it comes into conflict  
with at least one parameter of the  
predefined data recording standard, and  
further comprises at least one defect  
localization area (4, 8) containing  
position information on the position of  
the at least one defective area (3, 7) on  
the data carrier (1, 5).

WO 2004/107326 A2



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*